

## PUTRONS N<sup>®</sup> NC – General Purpose Close-coupled Pump 浦川 N<sup>®</sup> NC 紧凑型泵

Pumps in cast iron, for clean oil, non-abrasive liquids. The simpler and more compact construction makes it an ultra low-cost pump, frequently used in modified versions by OEM customers.

NC pumps are designed for use with IEC or NEMA flange motors.

用于干净的无颗粒的介质的铸铁泵。更简单和更紧凑的结构使用户投入的成本更低，常用于OEM用户的变更方案。


NC 泵设计用于与IEC 和NEMA法兰连接的电机。

### Typical application:

- Clean oil
- Glycol
- Vegetable oil
- Solvents
- Lube oil
- Waste oil
- Fish oil

### 典型应用：

- 清洁的油
- 乙二醇
- 植物油
- 溶剂
- 润滑油
- 废油
- 鱼油

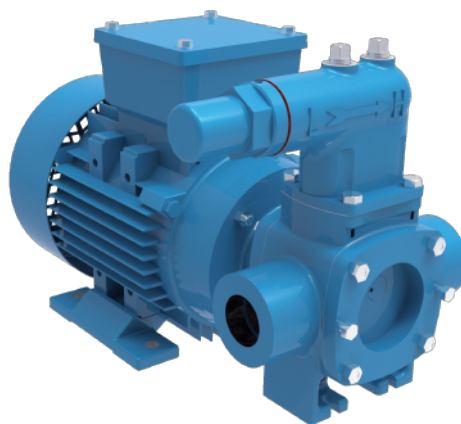

Capacity Range:	Up to 45 m³/h (200 USgpm)
Speed:	Up to 1750 rpm
Differential Pressure:	Up to 16 bar (232 PSI)
Suction Lift:	Up to 0.5 bar Vacuum while priming
	Up to 0.8 bar Vacuum while pumping
Viscosity Range:	Up to 7,500 cSt
Temperature:	Up to 150°C (302°F)
Casing Material:	Ductile iron/CS/SS
Sealing:	Mechanical seal
Ports:	Opposite (180°)
	Right angle (90°)
	Flanged (DIN or ANSI)
	Threaded (BSP or NPT)
Mounting:	Motor mount/Foot mount

流量范围：	最大45 m³/h (200 USgpm)
转速：	最高1750 rpm
压差：	最高16 bar (232 PSI)
自吸高度：	自吸时，最高0.5 bar 真空
	输送时，最高0.8 bar 真空
粘度范围：	最高 7,500 cSt
温度：	最高 150°C (302°F)
壳体材料：	球铁/碳钢/不锈钢
密封：	机械密封
连接方式：	进出口180°
	进出口90°
	法兰连接（DIN或ANSI标准）
	螺纹连接（BSP或NPT标准）
固定方式：	电机固定/底脚固定