


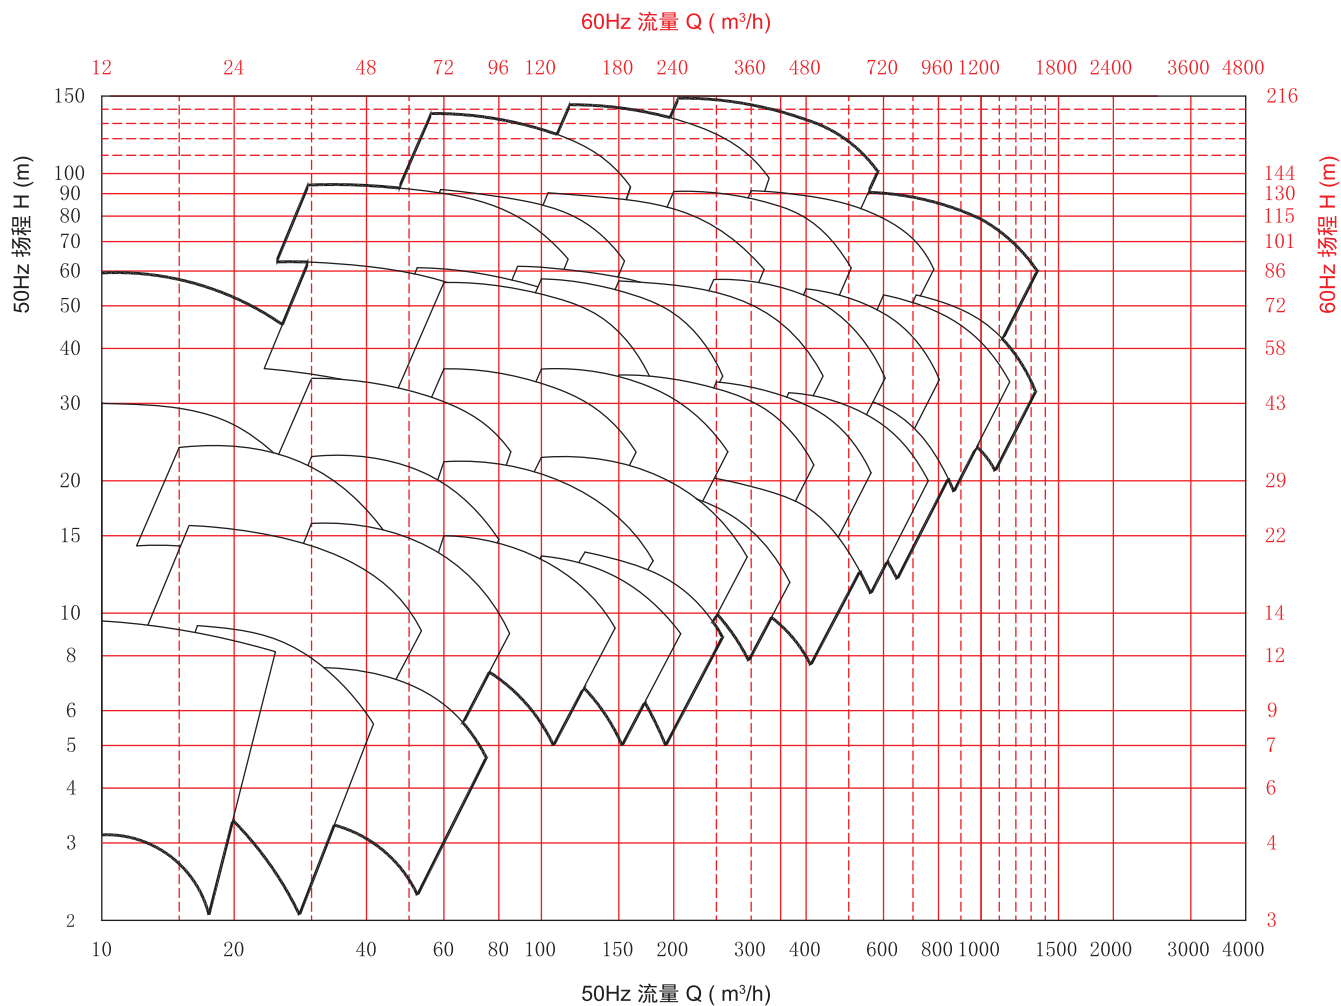

Operating data

操作数据

50 Hz	60 Hz
Head range: 5~150 m 15~500 feet	Head range: 5~220 m 15~720 feet
Flow rate range: 2~1500 m³/h 9~6600 USgpm	Flow rate range: 3~1800 m³/h 13~7900 USgpm
Medium temperature range: • With standard mechanical seal, max. medium temperature is up to 160 °C / 320 °F; • With special mechanical seal or configuration, max. medium temperature is up to 220 °C / 428 °F;	

50 Hz	60 Hz
扬程范围: 5~150 m 15~500 feet	扬程范围: 5~220 m 15~720 feet
流量范围: 2~1500 m³/h 9~6600 USgpm	流量范围: 3~1800 m³/h 13~7900 USgpm
介质温度范围: • 采用标准机械轴封, 最高温度可达 160 °C / 320 °F; • 采用特殊机械轴封或结构, 最高温度可达 220 °C / 428 °F;	

- For selection of pumps, please email psales@putrons.com or contact Putrons sales engineer.
泵选型请电邮 psales@putrons.com 或直接联系浦川流体销售工程师。